


F/C Radius = 25' Max.

R/W Radius = 25' Min.

NOTES:

1. 3-way intersections require 6 ramps unless driveway locations prohibit their installation. Deviation from 6 ramps requires approval from the City Engineer.
2. 4-way intersections require 8 ramps.

3. The buffer zone in old Hilliard may be hard surface, turf or a combination thereof based on the street character and surrounding land use. This area includes various furnishings including but not limited to, bicycle parking, furniture, or landscape beds.

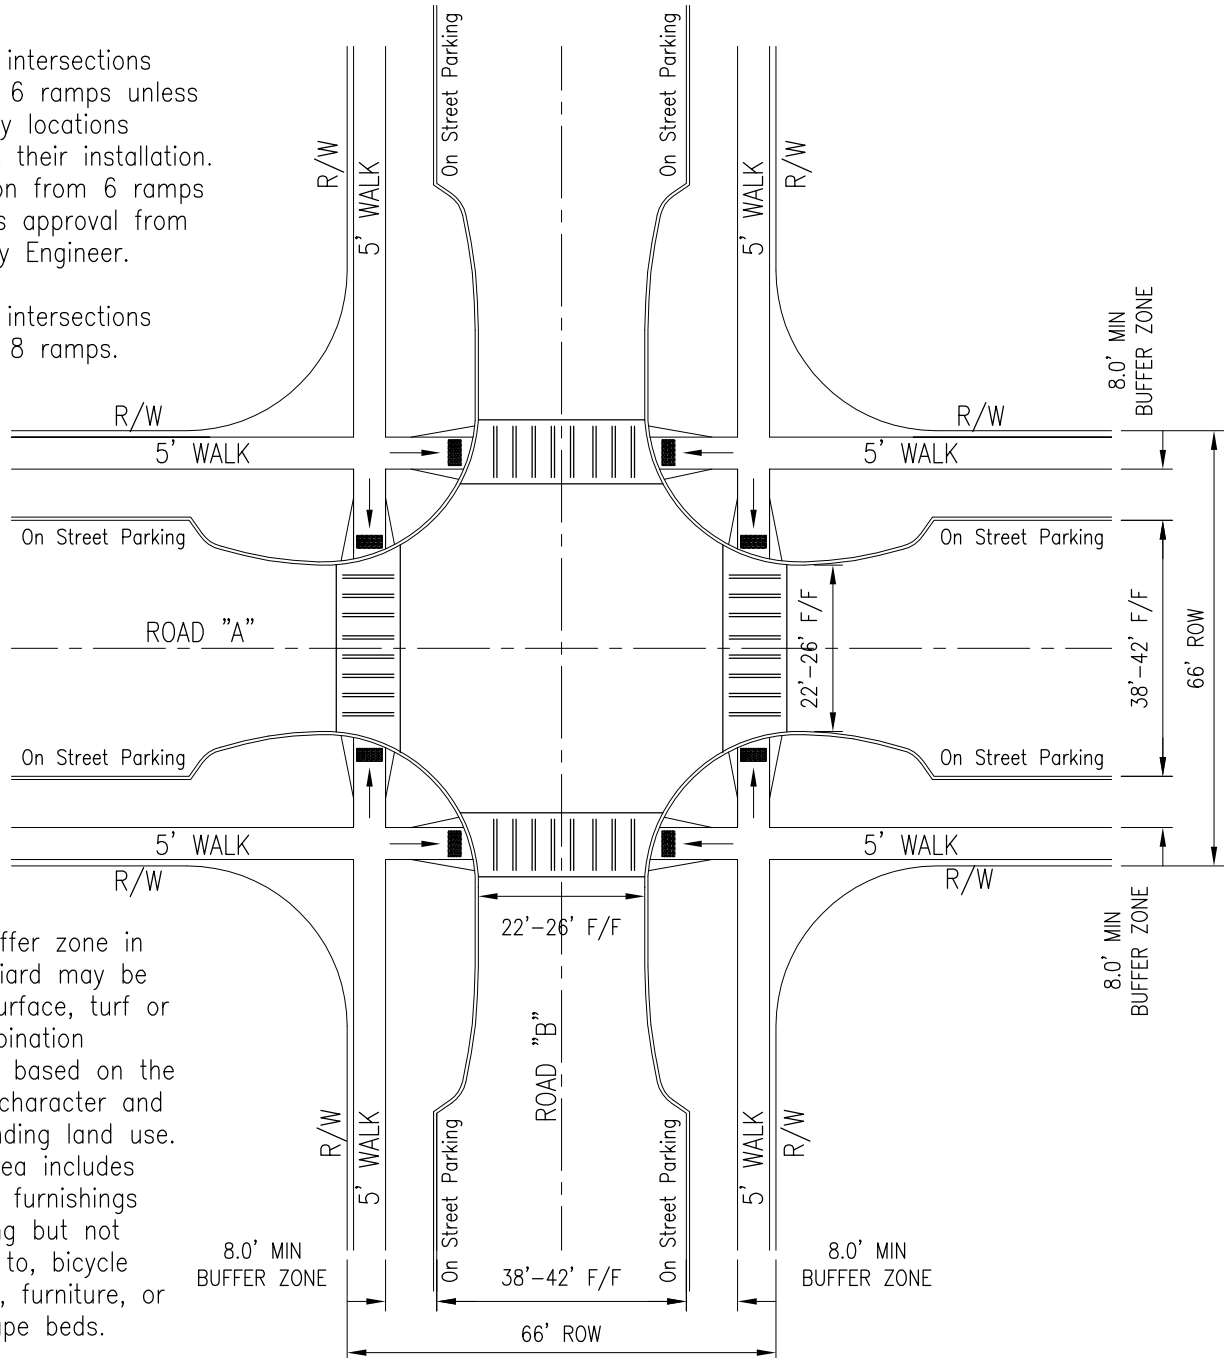

DATE: April 16, 2015		INTERSECTION DETAIL OLD HILLIARD DISTRICT 66' ROW		CITY OF HILLIARD, OHIO	
				STANDARD CONSTRUCTION DRAWING	
SCALE: 1" = 30'				1/1	ID-2